



SIZE "5" 2000NM - FLOOR PNEUMATIC ARTICULATED ARMS




SINGLE CYLINDER PERFORMANCE AND DIMENSIONS						
MODELS	BALANCING CAPACITY					
	2 Bar	3 Bar	4 Bar	5 Bar	6 Bar	7 Bar
S5PP111515000	/ Kg.	5 Kg.	20 Kg.	36 Kg.	52 Kg.	68 Kg.
D5PP111515000						
S5PP221515000	/ Kg.	/ Kg.	6,5 Kg.	18,5 Kg.	30,5 Kg.	42,5 Kg.
D5PP221515000						
MODELS	boom length mm	arm length mm	∅ units of balancing	torque limit Nm	vertical rod	usable vertical stroke
S5PP111515000	1500	1500	100	2000	50x50 60x60	1930
D5PP111515000						
S5PP221515000	2000	2000	100	2000	50x50 60x60	2570
D5PP221515000						
PERFORMANCE AND DIMENSIONS TWIN-CYLINDER						
MODELS	BALANCING CAPACITY					
	2 Bar	3 Bar	4 Bar	5 Bar	6 Bar	7 Bar
S5PP111525000	8 Kg.	38 Kg.	72 Kg.	90 Kg.	90 Kg.	90 Kg.
D5PP111525000						
S5PP221525000	/ Kg.	20 Kg.	45,5 Kg.	68 Kg.	90 Kg.	90 Kg.
D5PP221525000						
MODELS	boom length mm	arm length mm	∅ units of balancing	torque limit Nm	vertical rod	usable vertical stroke
S5PP111525000	1500	1500	100	2000	50x50 60x60	1930
D5PP111525000						
S5PP221525000	2000	2000	100	2000	50x50 60x60	2570
D5PP221525000						

Accessories available

Floor fixing (standard)	S5PP...	Vertical fixed wrist	PFV600000
	D5PP...		PFV600003
Wall mounting	S5FP...	Vertical swivel wrist	PGV600000
	D5FP...		PGV600003
Aerial runway fixing	S5VP...	Wrist axis rotary tool body	PAO610000
	D5VP...		
Vertical rod supplied with the arm.	A16000000	Clamp supports tool	MSO610000
Communicate the length at the time of purchase	A26000000		
		Tool holder bracket	SSO610000
Vertical axis pneumatic brake	F56P21000	Adjustable vertical-horizontal wrist	PPO610000
Pneumatic rotation brake Arm	G50P21000		
Horizontal axis pneumatic brake	P56P16600	Brackets supports encoder	E51000000
		Out-of-space sensors	E52000000
		Instrumentation support	Y50000000
			S00000000

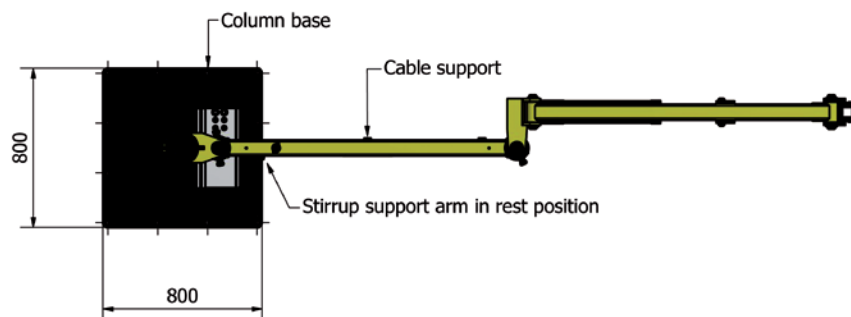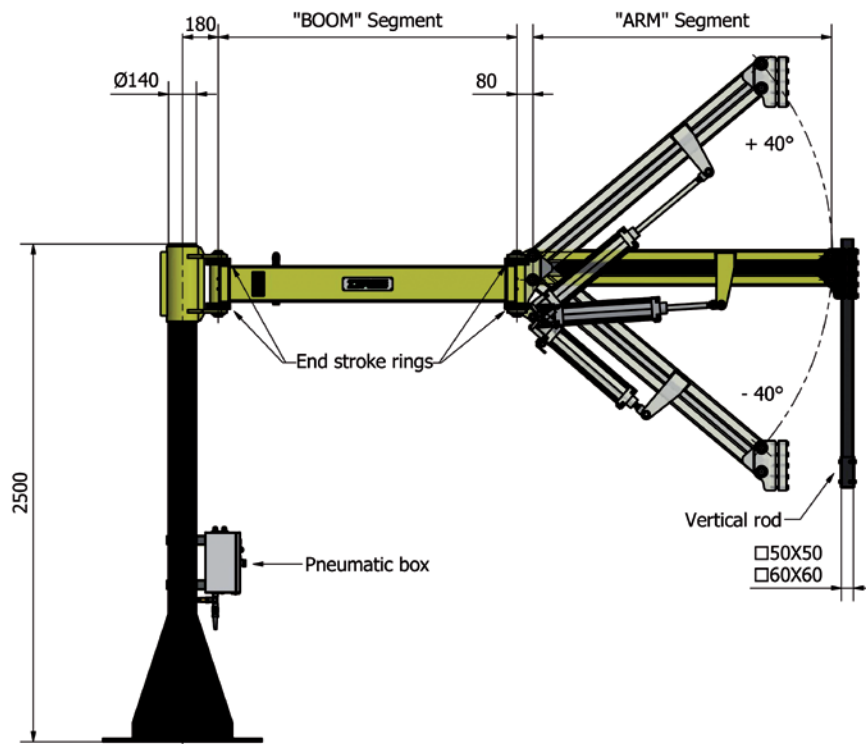

Plan Arm SX

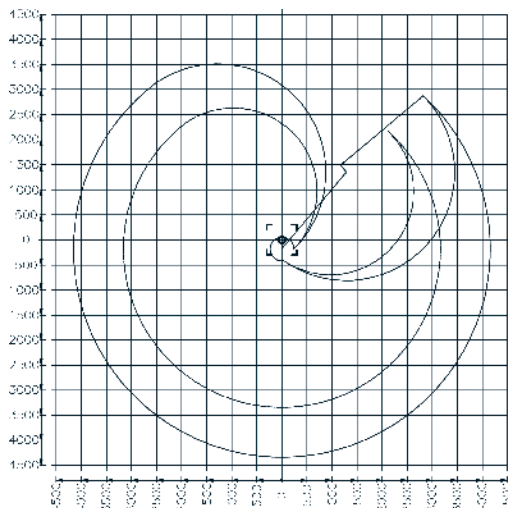

--- Boom L-1500
--- Arm L-1500

— Boom L-2000
— Arm L-2000

Plan Arm DX

