

SERIES M82..... - HP 1 KW 0,82



PERFORMANCE AND DIMENSIONS

Model	Free speed Turns / 1'	Speed at maximum Power Turns / 1'	Maximum torque Power Nm	Couple at the cue nm	Stall torque Nm	Quote "L" mm	Weight Kg.	Consumption l/sec
	6,3 bar	6,3 bar	6,3 bar	6,3 bar	6,3 bar			
	HP 1	HP 1	HP 1	HP 1	HP 1			
M82R1	13600	6800	1.2	1.7	2.3	199	2.3	18
M82R1A	4000	2000	3.9	5.8	7.8	199	2.3	18
M82R1B	2400	1200	6.5	9.5	13	199	2.3	18
M82R1C	1800	900	8.7	13	17	199	2.3	18
M82R1D	850	425	19	27	37	199	2.5	18
M82R2	520	260	30	45	60	199	2.5	18
M82R2A	400	200	39	59	78	199	2.5	18
M82R2B	200	100	78	117	156	255.5	4.6	18
M82R2C	130	65	120	180	240	255.5	4.6	18
M82R2D	90	45	174	261	348	255.5	4.6	18

AVAILABLE VERSIONS

N - No lube
F - Flange fixing
A - Atex Certification

VERSIONS NOT AVAILABLE

N - Non-reversible (right-hand rotation)
S - Non-reversible (counterclockwise rotation)

Lubrication: 2-3 drops/1' in continuous service
4-6 drops/1' in intermittent service

Filtration: 64 µ o migliore

Radial load: 3900 N max da R1 a R2A
5600 N max da R2B a R2D


Axial load: 1800 N max da R1 a R2A
2800 N max da R2B a R2D

**Temperature
operating:** da -20°C a +80°C





MODELS DA M82R1 A M62R2A

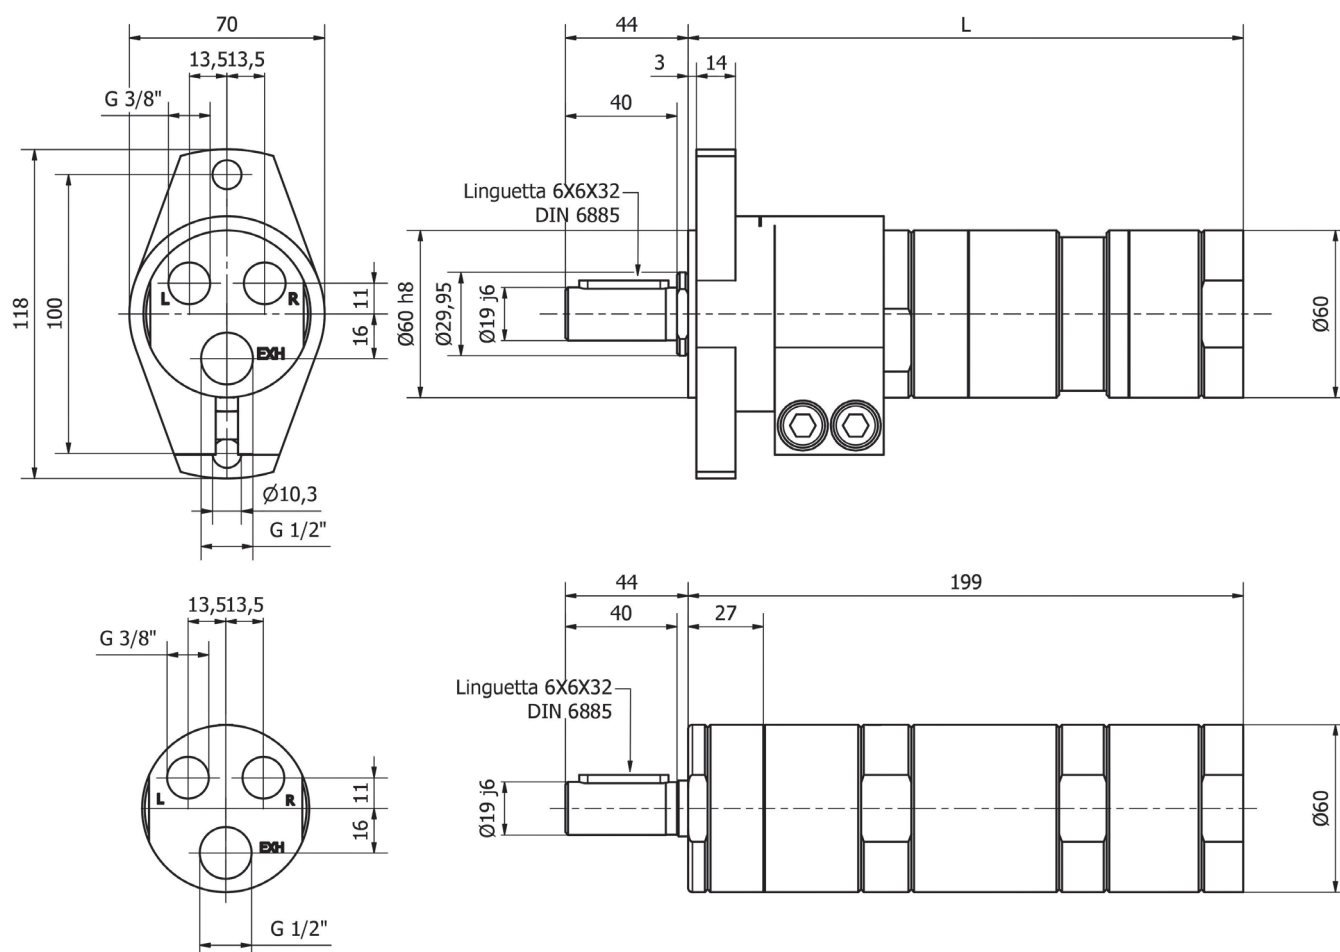

MODELS DA M82R2B A M62R2D

