
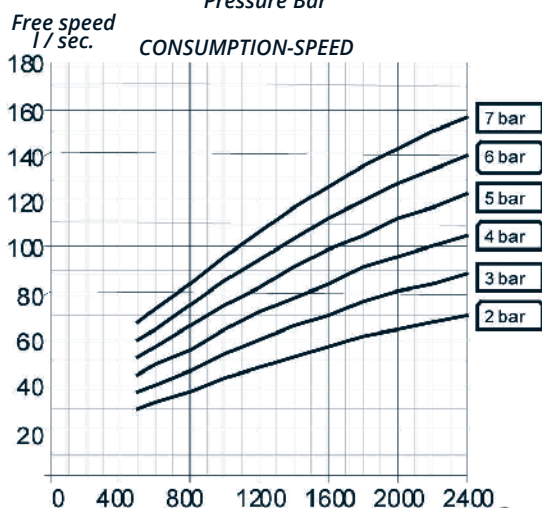
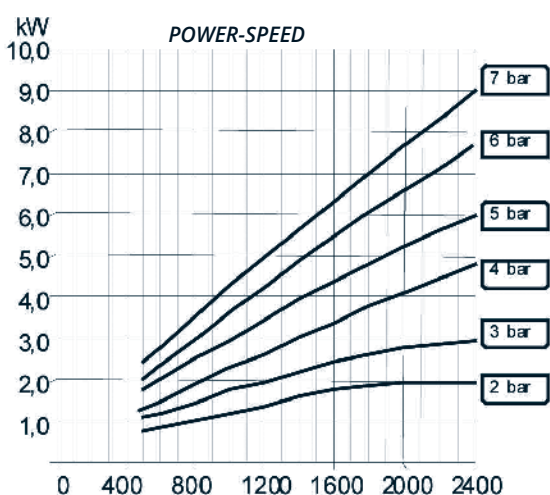
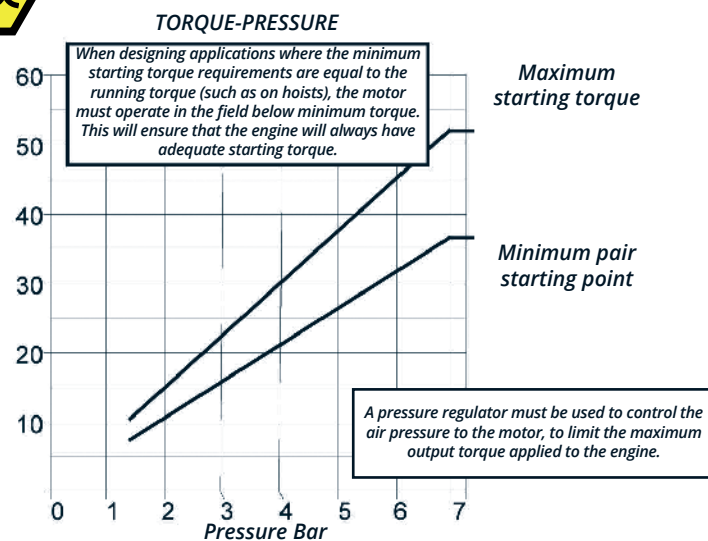


M1100BN100H4/R4

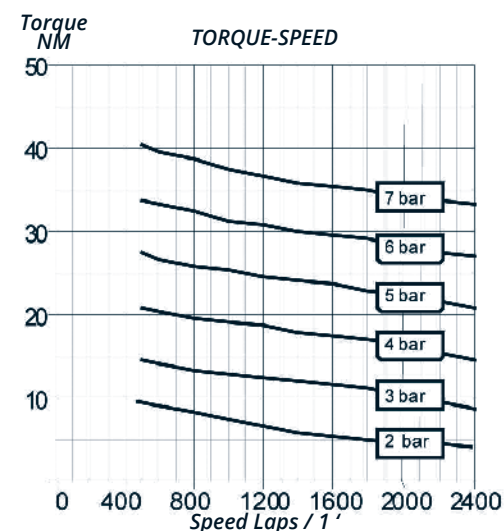

Silencer delivered with the motor.

Noise level: 86 dB

The motor is reversible.

Position: the motor can be used in any position.

Temperature range

from -20 °C to +80 °C (-4 °F to +176 °F).

FILTERING AND LUBRICATION

Filtering rate 64 micron or higher. Choose a lubricator suitable for the required flow rate. When first starting the motor, inject the oil into the inlet gate.

Lubricator continuous drop rate: 8-10 drops / minute

Lubricator intermittent drop rate: 14-16 drops / minute

Maximum continuous speed 2400 rpm

Maximum radial load on the motor shaft 620 N (140 lbf.).

Axial loads need to be kept to a minimum.

