
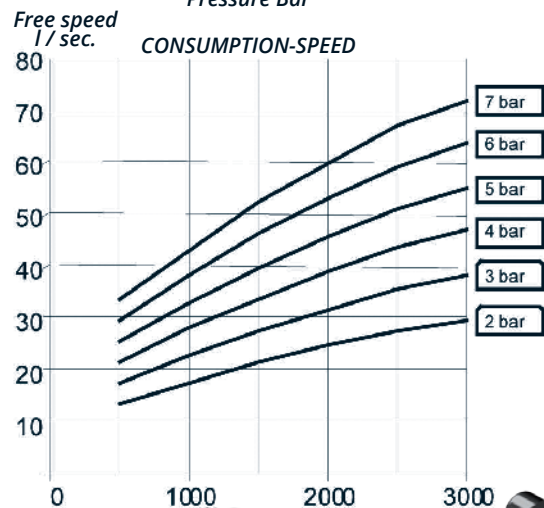
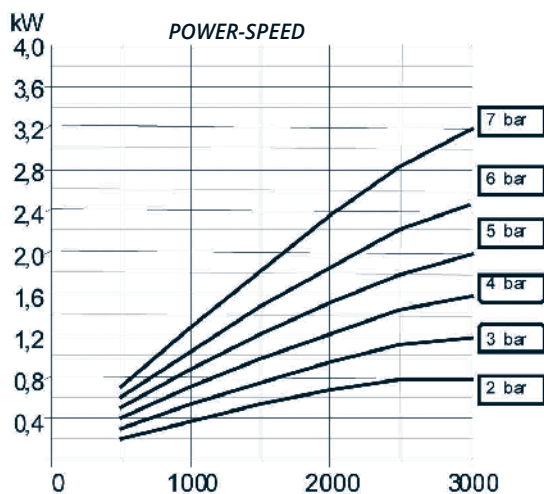
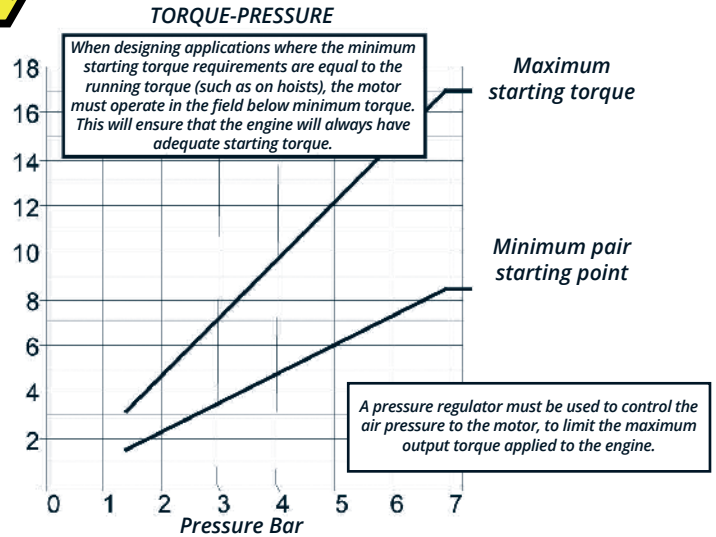


M410BN90H2/R2

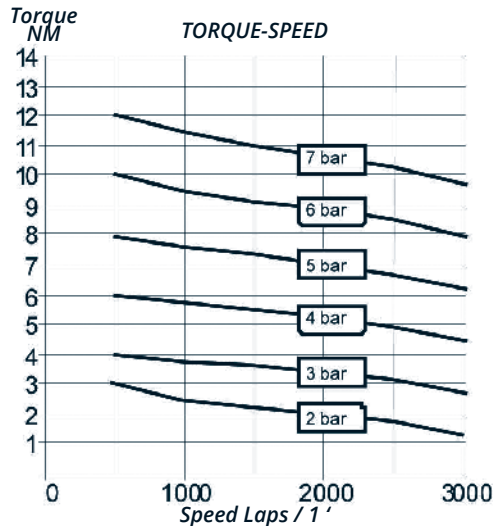

Silencer delivered with the motor.

Noise level: 84 dB

The motor is reversible.

Position: the motor can be used in any position.

Temperature range

from -20 ° C to +80 ° C (-4 ° F to +176 ° F).

FILTERING AND LUBRICATION

Filtering rate 64 micron or higher. Choose a lubricator suitable for the required flow rate. When first starting the motor, inject the oil into the inlet gate.

Lubricator continuous drop rate: 5-6 drops / minute

Lubricator intermittent drop rate: 10-12 drops / minute

Maximum continuous speed 3000 rpm

Maximum radial load on the motor shaft 300 N (70 lbf.).

Axial loads need to be kept to a minimum.

