
VERTICAL-HORIZONTAL ADJUSTABLE

This type of wrist is used for horizontal and vertical tightening. A fork allows for rotation of the tool from 0 to -90° on the horizontal axis, which can be locked In various positions using a manual stop.

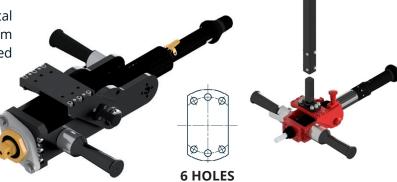


WRIST MODEL	TORQUE LIMIT	AVAILABLE ACCESSORY FOR EACH ARM	NUMBER OF FLANGE HOLES	VERTICAL ROD	WEIGHT
	Nm	Size			Kg.
PPO310000	150	1	6	30X30	*
PPO410000	500	2-3	6	40X40	*
PPO510000	1000	3-5	6	50X50	*
PPO61000	2000	5	6	60X60	*

^{*} The WEIGHT varies depending on the size of the toolutilizzare.

24 LOCK VERTICAL REVOLVING

This type of wrist, normally locked, makes it possible to release the vertical axis using the handle on the body of the wrist, which allows for 360° rotation and a 15° connection level.

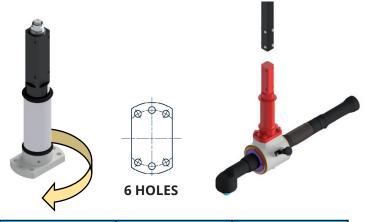

WRIST MODEL	TORQUE LIMIT	AVAILABLE ACCESSORY FOR EACH ARM	NUMBER OF FLANGE HOLES	VERTICAL ROD	WEIGHT
	Nm	Size			Kg.
PBV300000	150	1	6	30X30	3
PBV400000	500	2-3	6	40X40	3
PBV500000	1000	3-5	6	50X50	6
PBV600000	2000	5	6	60X60	8